


SP160M-32

Comprehensive Certificates

- IEC61215, IEC61730
- ISO9001:2015 Quality management systems
- ISO45001:Environmental management systems
- ISO45001:2018 Occupational health and safety management systems

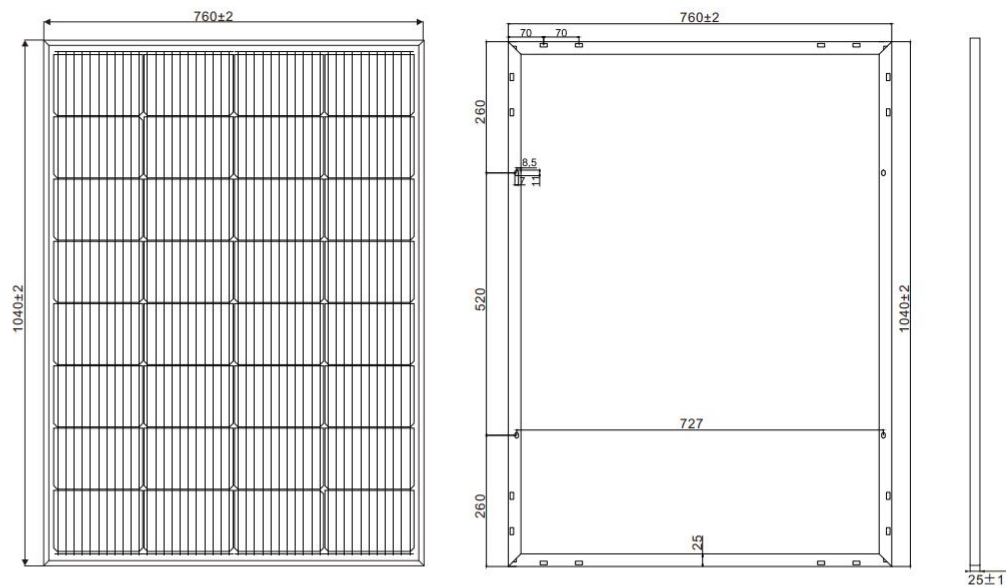

PS: Frame color and cable length can be customized

Electrical Parameters at (STC)


Module	Power (W)	Module Efficiency(%)	Voltage at Pmax(Vmp)	Current at Pmax(Imp)	Open Circuit Voltage(Voc)	Short Circuit Current(Isc)	Power Tolerance(w)
SP160M	160W	20.20%	18.24	8.77	21.80	9.30	±3%

Mechanical Parameters	
Solar Cell(Type/Size)	MONO(182mm)
Solar Cells Number	32Pcs(4x8)
Dimension	1040x760x30mm
Weight	8.30Kg/Pcs
Tempered Glass	3.2 mm High Permeability Coated
Frame	Anodized aluminum alloy
Junction Box	IP67, 2* bypass diode
Cable	2.5mm ² , (+)700mm/(-)700mm
Connector	Original MC4/Compatible MC4
Mechanical Load	Front 5400PA/back 2400PA


Packing	
Module Type	SP160M-32
Carton Size	1060x780x75mm
Number	2Pcs/Ctn
Weight	17Kg/Ctn
Volume	0.062Cbm/Ctn
20GP Container	984Pcs
40HQ Container	2280Pcs

Characteristics


Current Voltage Curve SP160M/32



Power Voltage Curve SP160M/32



Current Voltage Curve SP160M/32



STC: ☀ Light intensity 1000W/m² 🔋 Battery temperature: 25°C ☁ atmosphere quality=15
 NOCT: ☀ Light intensity 800W/m² 🔋 Battery temperature: 20°C ☁ atmosphere quality=15 🌀 wind velocity 1m/s